


NEW FOR 2000 See

Your simple guide to preparing, finishing and maintaining timber garden decking

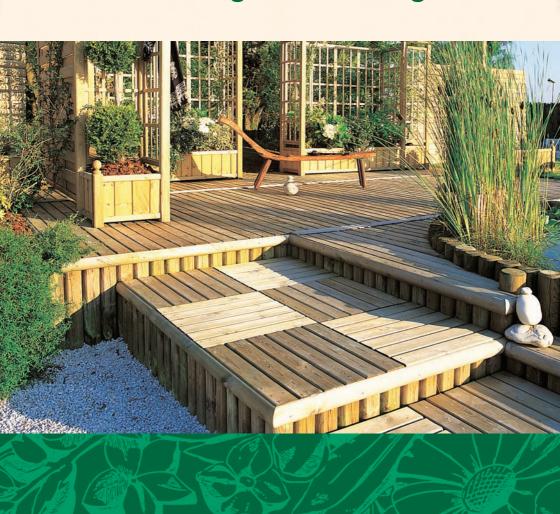

Manufacturer of quality decking finishes

You can bring out the natural beauty of your timber garden decking and ensure a hardwearing finish year after year by using Liberon's range of decking treatments. We're the choice of the professionals and are happy to offer advice on using the right Liberon product to achieve the finish you want.

In this booklet you will find the appropriate treatment for your decking as well as simple steps and useful tips to give you the confidence to use Liberon products to create stunning results.



NEW Tough Deck Clean & Revive

A HIGHLY **EFFECTIVE CLEANER** FOR CLEANING OLD, TIRED AND DIRTY **DECKING WHICH HAS** FADED OVER TIME.



Purbose

An effective cleanser for cleaning old, tired and dirty natural wooden decking which has dulled and faded over time. It helps to remove black spotting caused by mould or lichen from most types of wood to leave the surface clean and ready for refinishing.

Application

Stir well before use. Dilute Tough Deck Clean and Revive with up to 2 parts water in a bucket. Apply the cleaner using a scrubbing brush or stiff broom, rinse with clean water and repeat as necessary until the timber is clean. Wipe off any excess water and allow the timber to dry thoroughly for a minimum of 24 hours before applying any finishing products. For stubborn marks, a stronger solution of Tough Deck Clean and Revive may be required.



Size: 2L









AQUA-STOP® Tough Deck Finish NEW



ADVANCED 3 IN I
FORMULATION OF STAIN
PROTECTION, LONG
LASTING COLOUR AND
TIMBER SEALER IN ONE
EASY STEP.

Purpose

This 3-in-1 product gives wood extreme protection from wear, tear and weathering, long-lasting colour and high resistance against food, oil and alcohol stains. Using innovative water-based Nano technology, AQUA-STOP Tough Deck Finish penetrates deep into the wood to prevent damage by water, stains and sunlight whilst guaranteeing long lasting protection against weathering. Its liquid formula contains natural oils making it easy to apply giving a matt finish which enhances the natural grain of the wood.

Application

Stir well before use. Ensure the surface is clean, dry and free from previous finishes and dust. Apply a generous coat of AQUA-STOP[®] Tough Deck Finish with a paint brush or roller. Allow to penetrate for 15 to 30 minutes (depending on the porosity of the wood). Wipe off any excess with a lint-free cotton cloth. Apply a second coat in the same way as the first. Leave to dry for 2 hours. Wait 24 hours before using your decking.

Size: 2.5L 5L













Medium Oak

Light Cedar



*

Oregon Pine

Burmese Teak



Decking Oil

HIGHLY EFFECTIVE. UV ENHANCED. LONG-LASTING OIL SUITED TO MOST **VARIETIES OF TIMBER** DECKING.



Colours





Purbose

Feeds, protects, seals and enhances the natural beauty of your decking. Suitable for new and old decking, and in the latter's case, will revive and add colour to faded or worn surfaces.

Application

Stir thoroughly before use and apply with a large paint brush or roller to a clean, dry and varnish-free surface. Allow to penetrate for 15 to 30 minutes then apply a second coat. Continue to apply coats until the timber no longer absorbs the oil.

Wipe off any excess and allow to dry.

Size: 2.5L 5L



Libtibs

Oil finishes bring out the natural colours of timber. A wet surface will be an indication of the final colour. Use protective gloves.









Balustrade Woodstain NEW



SPECIALLY FORMULATED, VERY HARDWEARING WOODSTAIN FOR THE PROTECTION OF EXPOSED VERTICAL TIMBER.

Purpose

Resistant to severe weathering (ice, snow, rain and heat), impervious to temperatures of -40°C to +60°C and prolonged exposure to sunlight, Liberon Balustrade Woodstain is ideal for use on timber balustrading and other exposed vertical timber. Offering up to 10 years protection and long lasting colour durability it keeps maintenance to a minimum.

Application

Ensure the surface is sanded if required, clean, dry and free from dust. Stil well before use. Apply a minimum of 2 coats of Balustrade Woodstain with a brush, spray (10% dilution with water) or a roller. On new or heavily exposed timber we recommend applying a third coat when using a light coloured stain.

Size: 750ml

Libtips

Apply out of direct sunlight and where there is good ventilation. This prevents the woodstain from drying out too quickly.









Colours













AQUA-STOP® Deck Aftercare NEW

GENTLE CLEANER FOR MAINTAINING THE PERFECT FINISH ON TIMBER DECKING.



Purbose

AQUA-STOP® Deck AfterCare has been developed for the regular maintenance of wooden decking. Containing soft soap and cleansers, it will effectively clean general dirt and surface grease from wooden decking without damaging most stain and protection products already applied to the surface.

Application

Ensure the decking has been swept well prior to application. Dilute 100ml of AQUA-STOP® Deck AfterCare in 5L of tepid water. Apply with a damp cloth. In dirty areas, use a scouring brush. Allow to dry. No need to rinse. AOUA-STOP® Deck AfterCare is lightly scented. It gives off a delicate aroma of cedar.



Size: 2L









Liberate the spirit of your home

OUR PLEDGE. YOUR GUARANTEE.

LIBERON HAS DESIGNED MARKET LEADING, INNOVATIVE WOOD AND STONE TREATMENT PRODUCTS FOR OVER A CENTURY. ALL OUR PRODUCTS ARE GUARANTEED TO PROVIDE EFFECTIVE, LONG-LASTING RESULTS WHEN APPLIED CORRECTLY.

IF YOU HAVE ANY QUESTIONS ABOUT THE SELECTION OR USE OF LIBERON GARDEN PRODUCTS SIMPLY CONTACT LIBERON TECHNICAL SERVICES ON 01797 361136 FOR EXPERT ADVICE.







We're as effective indoors!

For details of our comprehensive furniture and flooring ranges, please call us on 01797 367555.



Liberon Ltd, Mountfield Industrial Estate, New Romney, Kent TN28 8XU
Tel: 01797 367555 Fax: 01797 367575 Technical Advice: 01797 361136 www.liberon.co.uk